
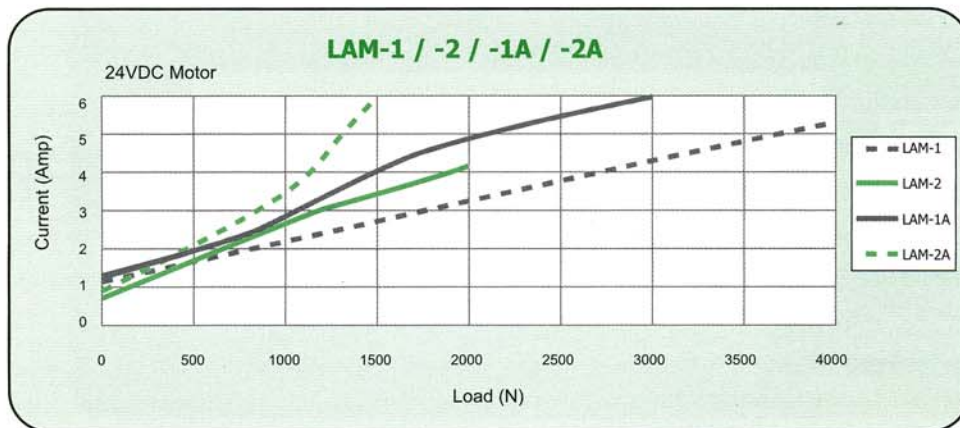


● **LAM-1/-2 Specifications**

Model	Screw type	Thrust max. (N)	Pulling max. (N)	Holding force max. (N)	Speed (mm/s) Load=Max./Load=0	Standard stroke (mm) : S							Duty cycle %	Max.current (A)	
						100	150	200	250	300	350	400		12VDC	24VDC
LAM-1	Ballscrew	4000	3000	4000	8 / 11	100	150	200	250	300	350	400	10	12	6
LAM-2	Ballscrew	2000	2000	1200	16 / 21	100	150	200	250	300	350	400	10	12	6
LAM-1A	ACME	3000	3000	3000	8/11	100	150	200	250	300	350	400	10	12	6
LAM-2A	ACME	1500	1500	1500	16/21	100	150	200	250	300	350	400	10	12	6

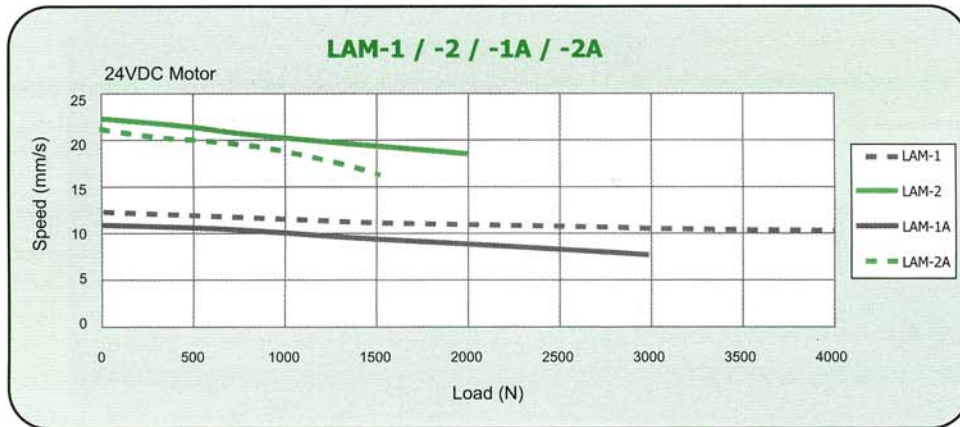

Note: The test results are obtained by using 24VDC power supply.

● **Ordering Information**

