
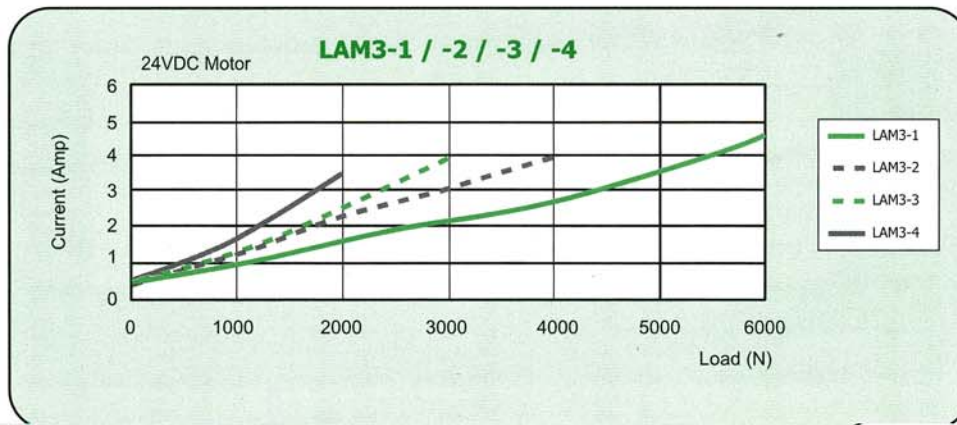


LAM3 Specifications

Model	Thrust max. (N)	Pulling max. (N)	Holding force max. (N)	Speed (mm/s) Load=Max. / Load=0	Standard stroke (mm) : S								Duty cycle %	Max.current (A) 24VDC
					50	100	150	200	250	300	350	400		
LAM3-1	6000	5000	5000	4 / 5.5	50	100	150	200	250	300	350	400	10	6
LAM3-2	4000	4000	4000	5.5 / 7.5	50	100	150	200	250	300	350	400	10	5
LAM3-3	3000	3000	3000	7 / 9	50	100	150	200	250	300	350	400	10	4
LAM3-4	2000	2000	1500	11.5 / 14.5	50	100	150	200	250	300	350	400	10	4

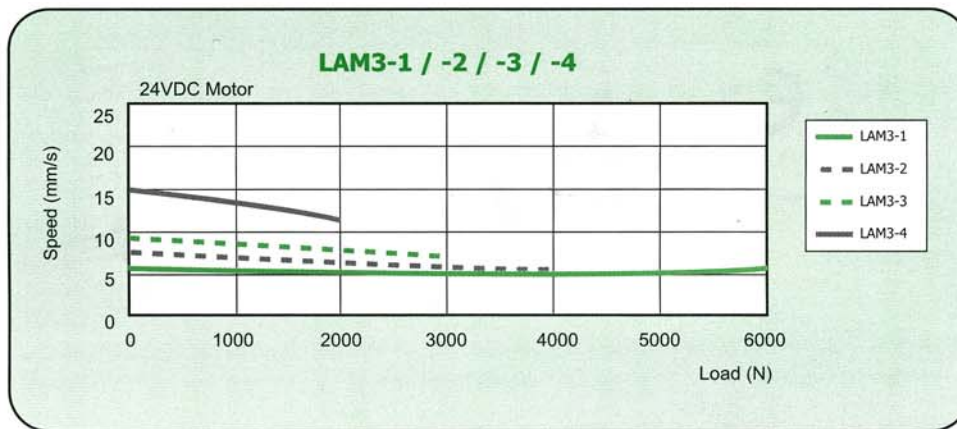

Note: The test results are obtained by using 24VDC power supply.

Ordering Information

