

# 8. HIWIN LAN Series (1)

## LAN1




Screw type	ACME
Weight*	2.5 kg
Protection	IP54
Compatible controller	LAK2 / LAK2B / LAK2D / LAK4 / LAK6B
Working temp	+5°C ~ 40°C

Position feedback specifications (Hall Sensor)		
Supply voltage	24VDC	12VDC
Output	High level 22VDC Low level 0.2v/10mA sink (NPN)	High level 12VDC Low level 0.2v/10mA sink (NPN)

\* Stroke length 200 mm

\* Option: (1)IP66

- (2)position feedback
- (3)Safety nut ( RL=S+185)
- (4)Spline(push only) ( RL=S+223)
- (5)Back fixture turn 90°
- (6)Mechanical quick release(RL=S+230)

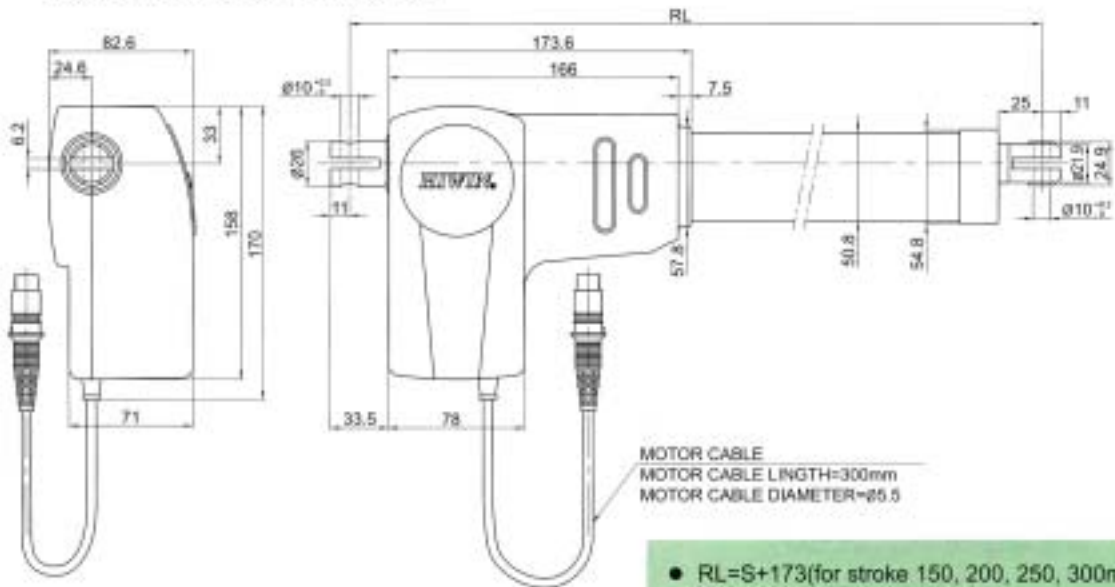

MOTOR CABLE  
MOTOR CABLE LENGTH=300mm  
MOTOR CABLE DIAMETER=65.5

- RL=S+173(for stroke 150, 200, 250, 300mm)
- RL=S+188(for stroke 100mm)
- RL :Retracted length
- S :Stroke length