
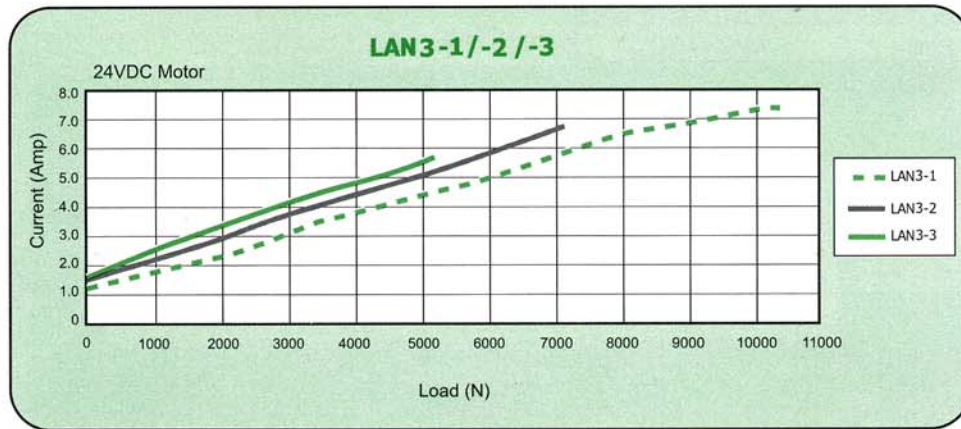


LAN3 Specifications

Model	Thrust max. (N)	Pulling max. (N)	Holding force max. (N)	Speed (mm/s) Load=Max./Load=0	Standard stroke (mm) : S										Duty cycle %	Max. current(A) 24VDC	Potentiometer Resolution (Ohm/mm)
					110	150	200	250	300	350	400	-	-	450			
LAN3-1	10000	6000	10000	5.0 / 8.0	110	150	200	250	300	350	400	-	-	10	7.5	35	
LAN3-2	7000	6000	7000	7.0 / 9.0	110	150	200	250	300	350	400	450	500	10	7	30	
LAN3-3	5000	5000	5000	9.5 / 12.5	110	150	200	250	300	350	400	450	500	10	7	25	

* Stroke over 200mm(included), RL=S+260

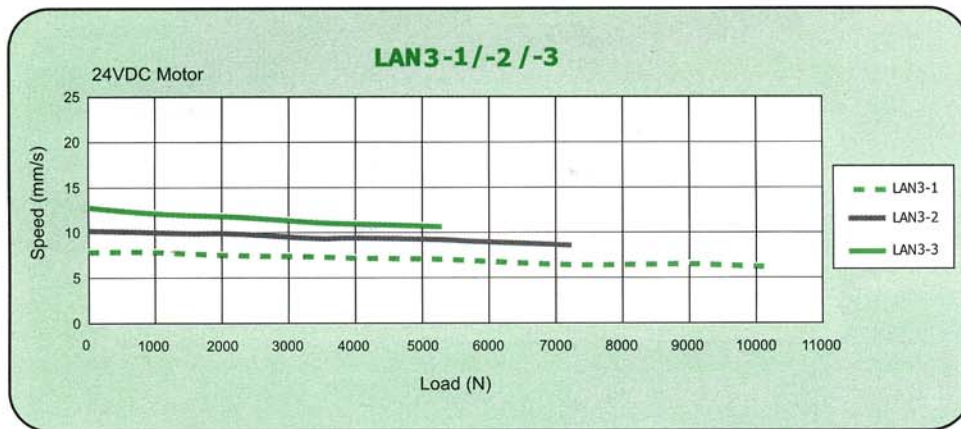

Note: The test results are obtained by using 24VDC power supply.

Ordering Information

