

4. **HIWIN LAS Series (2)**


LAS3



Screw type	ACME
Weight*	1.1 kg
Protection	IP 54
Compatible controller	LAK2

Position feedback specifications (Optical Sensor)	
Supply voltage	24VDC
Output	High level 24VDC Low level 0.2v/5mA PNP

*Stroke length 200mm
*Option: position feedback

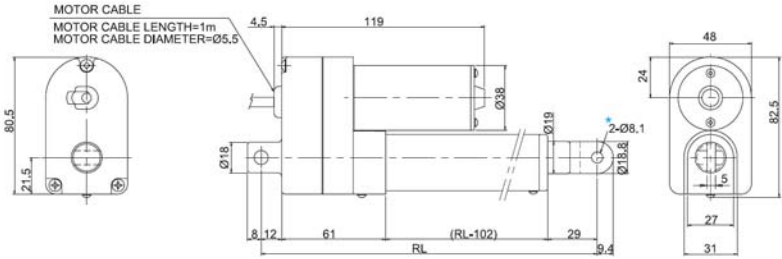

- RL=S+146
RL: Retracted length
S: Stroke length

Note: Piston rod eye, marked with *, can be rotated 180° counterclockwise to adjust the orientation of the hole of the front end.